



## Keymer Kent Peg Tile - Antique


### Product Technical Information Sheet

#### Roof Tiling

Material	Clay
Minimum roof pitch	40°
Headlap	60 mm
Batten spacing (fixed gauge) <sup>1</sup>	95mm
Size of tile <sup>1</sup>	250 x 150 mm
Covering capacity	70.2 tiles per m <sup>2</sup>
Cover width	150 mm
Profile depth	13 mm
Hanging length	230 mm
Weight as laid	84.3 kg per m <sup>2</sup>
Weight per 1000 (including pallet & packaging)	1.24 tonnes
Weight per tile	1.2 kg
Weight per pallet (including pallet & packaging)	0.989 tonnes
Bond	Cross / Broken
Quantity per pallet	800
Battens per m <sup>2</sup>	10.6 m
Batten size - up to 600 mm rafter centres	38 x 25 mm
Nail size/type for tiles	Fix with oak or aluminium pegs

**Note:**

**Vertical Tiling** - Peg Tiles are a traditional product and therefore are not manufactured to a British Standard. When vertical tiling please contact your local conservation officer regarding installation information.

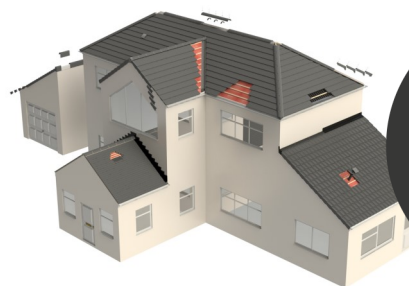

**BIM Objects Download**



<sup>1</sup>Clay tiles are subject to small variations in size because of drying and firing shrinkage in the manufacturing process. Before deciding on the batten gauge and linear coverage, the roof tiler should inspect each batch of tiles to ensure that the correct minimum headlap and sidelap are achieved. Unless otherwise stated, data is based on the tiles laid at minimum headlap.

**Tile Fixing** - For information regarding tile fixing please contact the Heritage team.

Product specification is subject to change and will be updated accordingly. Date of this data sheet publication; 29/09/2022